


Pressure Sensor of Stainless Steel Construction Is Ideal for a Wide Range of Applications


- Incorporates double diaphragms consisting of SUS316L stainless steel and silicone diaphragms that are applicable to a variety of gases and liquids.
- Two models with different pressure sensing ranges: 0 to 500 kPa and 0 to 1 MPa.
- Linear output from 4 to 20 mA with excellent linearity.
- IEC IP66 degree of protection: Washable with water.



 Be sure to read *Safety Precautions* on page 4.

Application Examples

- **Semiconductor Manufacturing Equipment:** Pressure monitoring and control
- **Automatic Assembly Equipment:** Pneumatic pressure control
- **Robots:** Pneumatic pressure control
- **Production Lines:** Pneumatic pressure control
- **Industrial Material Pneumatic Transportation Systems**
- **Pressure Tank:** Pressure control
- **Tank Level Control**

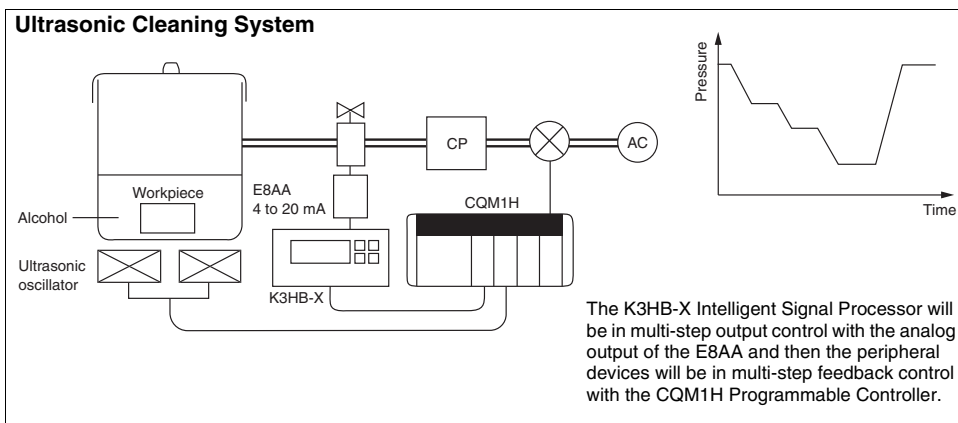

Ordering Information

Pressure range	Output configuration	Model
0 to 500 kPa	Linear output (4 to 20 mA)	E8AA-M05
0 to 1 MPa		E8AA-M10


Ratings and Specifications

Item	Model	E8AA-M05	E8AA-M10
Power supply voltage		12 to 24 VDC $\pm 10\%$, ripple (p-p): 5% max.	
Current consumption		40 mA max. (standard value including 20-mA output current) at rated pressure	
Pressure type		Gauge pressure	
Pressure range		0 to 500 kPa	0 to 1 MPa
Withstand pressure		980 kPa	2 MPa
Applicable material		Non-corrosive gasses, non-corrosive liquids, inert gasses	
Accuracy (linear output)		$\pm 1\%$ FS max. with a resistive load of 150 Ω at 23°C	
Hysteresis (linear output)		$\pm 0.5\%$ FS max.	
Linearity (linear output)		$\pm 1\%$ FS max.	
Response time		100 ms max.	
Linear output		4 to 20 mA with a permissible resistive load of 300 Ω max.	
Ambient temperature		Operating: -10°C to 60°C (with no icing) Storage: -25°C to 70°C (with no icing)	
Ambient humidity		Operating/Storage: 35% to 95% (with no condensation)	
Temperature influence		$\pm 0.09\%$ FS/ $^{\circ}\text{C}$ max. between -10°C and 60°C	
Voltage influence		Max. output current fluctuation of $\pm 0.5\%$ FS at 12 VDC $\pm 10\%$ or 24 VDC $\pm 10\%$ with a ripple of 5%	
Insulation resistance		100 M Ω min. (at 500 VDC) between current carry parts and case	
Dielectric strength		1,000 VAC, 1 min	
Vibration resistance		Destruction: 10 to 500 Hz, 1.5-mm double amplitude or 100 m/s ² for 2 hours each in X, Y, and Z directions	
Shock resistance		Destruction: 1,000 m/s ² 3 times each in X, Y, and Z directions.	
Degree of protection		IEC 60529 IP66 (excluding end of cable)	
Pressure inlet		R(PT)1/4	
Connection method		Pre-wired (standard cable length: 2 m)	
Weight (packed state)		Approx. 250 g	
Material	Pressure port and casing	SUS316	
	Diaphragm	SUS316L	
	O-ring	Fluorocarbon rubber	
Accessories		Protective cap, instruction manual	

Engineering Data (Reference Value)


Output Current Fluctuation vs. Temperature

E8AA-M10

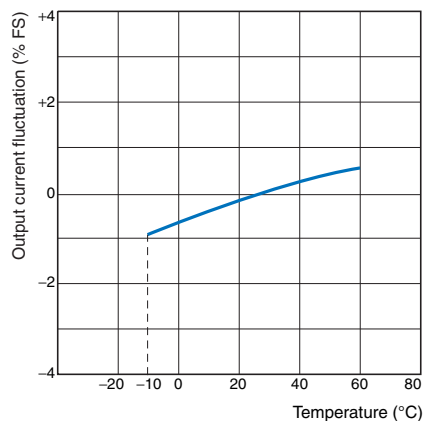


Linearity

E8AA-M05

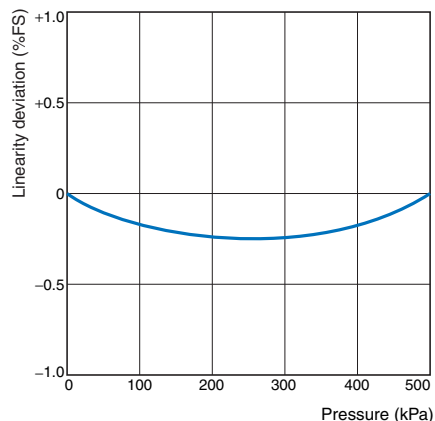


Output Current Fluctuation vs. Voltage

E8AA-M10

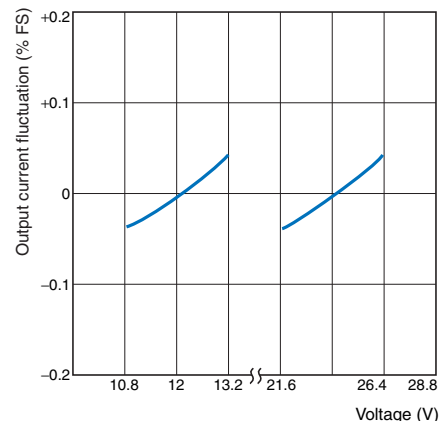


Output Current vs. Pressure

E8AA-M05 (E8AA-M10)

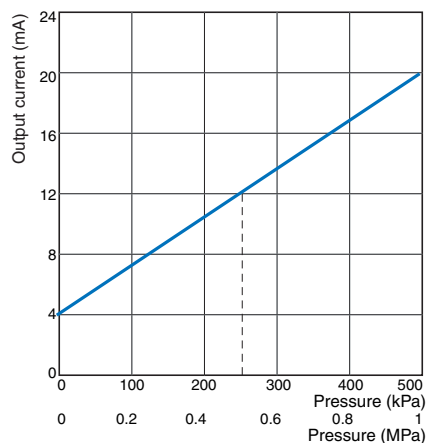


Output Current vs. Load


E8AA-M05

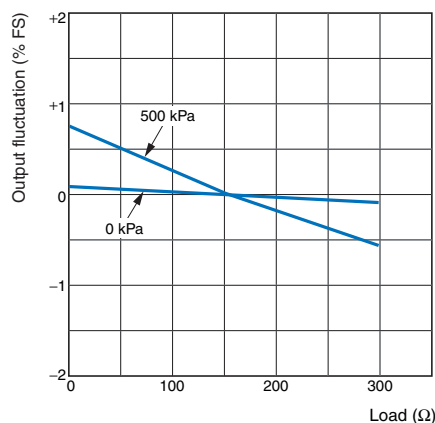


E8AA-M10

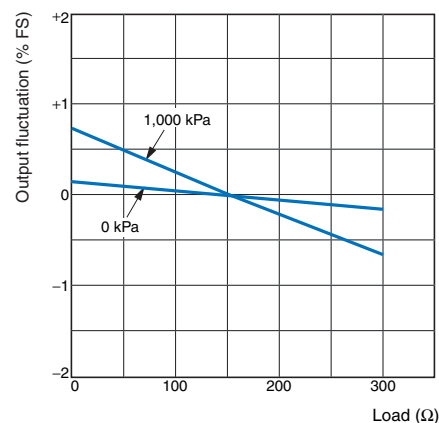

Nomenclature

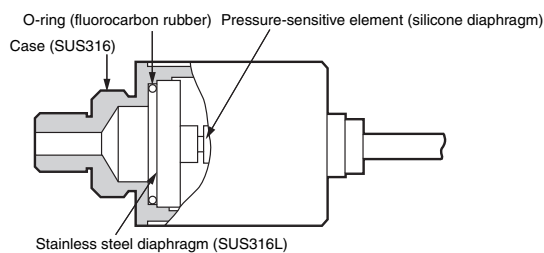

I/O Circuit Diagram

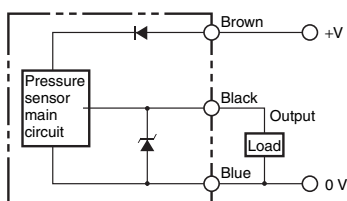

Safety Precautions

⚠ WARNING

This product is not designed or rated for ensuring safety of persons. Do not use it for such purposes.



Precautions for Correct Use

Do not use the product in atmospheres or environments that exceed product ratings.

Mounting

- The cable is in a hollow pipe in order to keep the pressure inside the Sensor the same as the atmospheric pressure. If the pipe is clogged, the accuracy of the Sensor may be lowered.
- Do not bend or impose a heavy weight on the output cable.
- Make sure that the tip of the output cable is open and not clogged with dust or water.
- If the diaphragms are damaged, the Unit will not operate properly. Do not insert a screwdriver or steel wire into the interior of the pressure-sensitive parts.
- The characteristics of the Unit will change if foreign material is stuck to the stainless steel diaphragm.

- The mounting screw for the pressure inlet is a PT1/4 taper screw. Do not use any other type of screw.
- Apply sealing tape to the PT1/4 screw part so that there will be no pressure leakage.
- The most suitable wrench is 22 mm in size.
- Do not apply a tightening torque higher than 49 N·m.
- Do not use the E8AA for applications in which the E8AA comes into direct contact with medical or food products.




Wiring

- If it is necessary to cut the output cable, make sure that the tip of the hollow pipe is not clogged.

Dimensions

(Unit: mm)

E8AA-M05
E8AA-M10

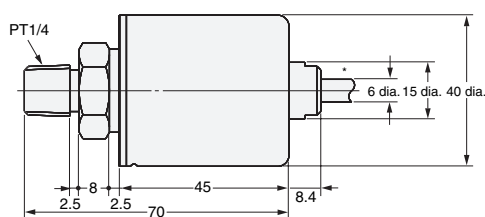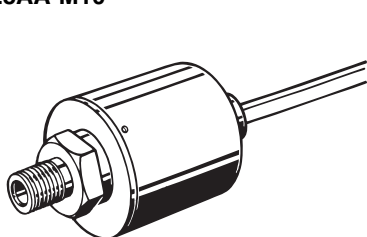

* 6-dia. vinyl-insulated round cable (in hollow pipe) with 3 conductors, (Conductor cross-section: 0.3 mm², Insulator diameter: 1.5 mm); Standard length: 2 m

In the interest of product improvement, specifications are subject to change without notice.

Terms and Conditions Agreement

Read and understand this catalog.

Please read and understand this catalog before purchasing the products. Please consult your OMRON representative if you have any questions or comments.

Warranties.

(a) Exclusive Warranty. Omron's exclusive warranty is that the Products will be free from defects in materials and workmanship for a period of twelve months from the date of sale by Omron (or such other period expressed in writing by Omron). Omron disclaims all other warranties, express or implied.

(b) Limitations. OMRON MAKES NO WARRANTY OR REPRESENTATION, EXPRESS OR IMPLIED, ABOUT NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OF THE PRODUCTS. BUYER ACKNOWLEDGES THAT IT ALONE HAS DETERMINED THAT THE PRODUCTS WILL SUITABLY MEET THE REQUIREMENTS OF THEIR INTENDED USE.

Omron further disclaims all warranties and responsibility of any type for claims or expenses based on infringement by the Products or otherwise of any intellectual property right. (c) Buyer Remedy. Omron's sole obligation hereunder shall be, at Omron's election, to (i) replace (in the form originally shipped with Buyer responsible for labor charges for removal or replacement thereof) the non-complying Product, (ii) repair the non-complying Product, or (iii) repay or credit Buyer an amount equal to the purchase price of the non-complying Product; provided that in no event shall Omron be responsible for warranty, repair, indemnity or any other claims or expenses regarding the Products unless Omron's analysis confirms that the Products were properly handled, stored, installed and maintained and not subject to contamination, abuse, misuse or inappropriate modification. Return of any Products by Buyer must be approved in writing by Omron before shipment. Omron Companies shall not be liable for the suitability or unsuitability or the results from the use of Products in combination with any electrical or electronic components, circuits, system assemblies or any other materials or substances or environments. Any advice, recommendations or information given orally or in writing, are not to be construed as an amendment or addition to the above warranty.

See <http://www.omron.com/global/> or contact your Omron representative for published information.

Limitation on Liability; Etc.

OMRON COMPANIES SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, LOSS OF PROFITS OR PRODUCTION OR COMMERCIAL LOSS IN ANY WAY CONNECTED WITH THE PRODUCTS, WHETHER SUCH CLAIM IS BASED IN CONTRACT, WARRANTY, NEGLIGENCE OR STRICT LIABILITY.

Further, in no event shall liability of Omron Companies exceed the individual price of the Product on which liability is asserted.

Suitability of Use.

Omron Companies shall not be responsible for conformity with any standards, codes or regulations which apply to the combination of the Product in the Buyer's application or use of the Product. At Buyer's request, Omron will provide applicable third party certification documents identifying ratings and limitations of use which apply to the Product. This information by itself is not sufficient for a complete determination of the suitability of the Product in combination with the end product, machine, system, or other application or use. Buyer shall be solely responsible for determining appropriateness of the particular Product with respect to Buyer's application, product or system. Buyer shall take application responsibility in all cases.

NEVER USE THE PRODUCT FOR AN APPLICATION INVOLVING SERIOUS RISK TO LIFE OR PROPERTY OR IN LARGE QUANTITIES WITHOUT ENSURING THAT THE SYSTEM AS A WHOLE HAS BEEN DESIGNED TO ADDRESS THE RISKS, AND THAT THE OMRON PRODUCT(S) IS PROPERLY RATED AND INSTALLED FOR THE INTENDED USE WITHIN THE OVERALL EQUIPMENT OR SYSTEM.

Programmable Products.

Omron Companies shall not be responsible for the user's programming of a programmable Product, or any consequence thereof.

Performance Data.

Data presented in Omron Company websites, catalogs and other materials is provided as a guide for the user in determining suitability and does not constitute a warranty. It may represent the result of Omron's test conditions, and the user must correlate it to actual application requirements. Actual performance is subject to the Omron's Warranty and Limitations of Liability.

Change in Specifications.

Product specifications and accessories may be changed at any time based on improvements and other reasons. It is our practice to change part numbers when published ratings or features are changed, or when significant construction changes are made. However, some specifications of the Product may be changed without any notice. When in doubt, special part numbers may be assigned to fix or establish key specifications for your application. Please consult with your Omron's representative at any time to confirm actual specifications of purchased Product.

Errors and Omissions.

Information presented by Omron Companies has been checked and is believed to be accurate; however, no responsibility is assumed for clerical, typographical or proofreading errors or omissions.